


Coastline Tile

Martin & Co.
Floors For Life

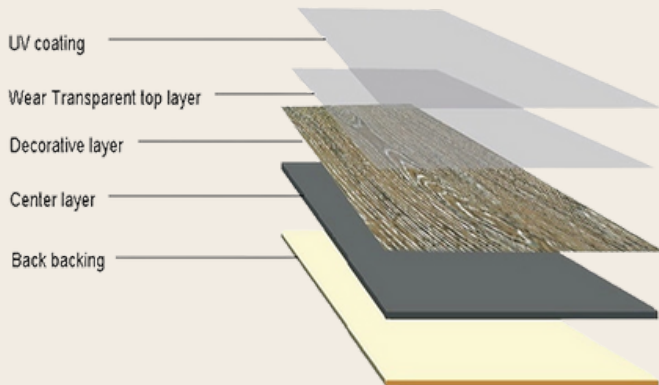

Features

- Loose Lay or Glue Down Installation System
- Kid & Pet Friendly
- Micro Bevel
- Light Stone Embossing
- Radiant Heat Approved
- Fiberglass Construction
- 12 mil Wear Layer



Product Information

Product	Coastline Tile Luxury Vinyl Flooring
Construction	Fiberglass vinyl
Dimention	4.8mm x 12" x 24"
Product Thickness	4.8mm
Wear Layer Thickness	12 mil (0.3mm)
Finish	Aluminum Oxide Finish
Warranty	Lifetime Residential / 10 Year Commercial

Testing

Classification	Method	Result
Class	ASTM F1700	Class III, Type B - Embossed
Slip Resistance	ASTM C1028-07	Dry: 0.80; Wet: 0.71
Static Load	ASTM F970	Applied Load: 1000 psi, Residual Indentation: 0.04mm
STC	ASTM E90-09	71
IIC	ASTM E492-09	71
Dimensional Stability	ASTM F2199	Pass: ≤ 0.02 " per linear foot
Resistant to Chemicals	ASTM F925	Pass: Not affected
Abrasion	ASTM D4060	Test Revolutions: 1000, 0.004% mass loss
Antibacterial Activity	ASTM G21-15	Pass: No growth observed on specimens
Reaction to Fire	EN13501-1	Class B fl-s1
Critical Radiant Flux	ASTM E648	Pass, > 0.45 watts/cm ²
Concentration of Dibutyl Phthalate	ISO 16000	$< 1 \mu\text{g}/\text{m}^3$ after 28 days
Concentration of Diethylhexyl Phthalate	ISO 16000	$< 1 \mu\text{g}/\text{m}^3$ after 28 days
Flexibility	EN435	No Damage

Packaging Information

	Length (mm)	Width (mm)	Thickness (mm)	Sq. ft.	Height (mm)	Volume (m ³)	# of carton per Pallet	Weight (lb.)
Plank	610	305	4.8					
Plank Carton	620	315	44	24.00 per carton				
Plank Pallet	1240	990	-	1344 per pallet	830	1.01	56	2500

MELMART.COM