


# Everest



## Features

- Glue Down Installation System
- Kid & Pet Friendly
- Micro Bevel
- Embossed in Register
- Radiant Heat Approved
- Suitable On, Above, or Below Grade
- 28 mil Wear Layer

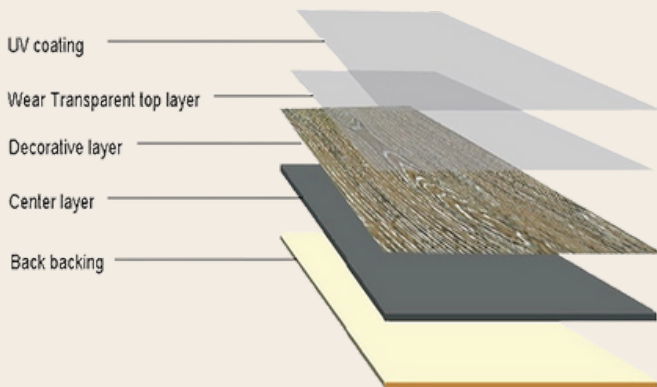

## Product Information

Product	Everest Luxury Vinyl Flooring
Construction	Dry Back
Dimension	3mm x 7.25" x 48"
Product Thickness	3mm
Wear Layer Thickness	28 mil (0.7mm)
Finish	Aluminum Oxide Finish
Warranty	Lifetime Residential / 30 Year Commercial

## Testing

Classification	Method	Result
Class	ASTM F1700	Class III, Type B - Embossed
Slip Resistance	ASTM C1028-07	Dry: 0.80; Wet: 0.71
Static Load	ASTM F970	Meets Guidelines
STC	ASTM E90-09	71
IIC	ASTM E492-09	71
Dimensional Stability	ASTM F2199	Pass: $\leq 0.02$ " per linear foot
Resistant to Chemicals	ASTM F925	Pass: Not affected
Abrasion	ASTM D4060	Test Revolutions: 1000, 0.004% mass loss
Antibacterial Activity	ASTM G21-15	Pass: No growth observed on specimens
Reaction to Fire	EN13501-1	Class B fl-s1
Critical Radiant Flux	ASTM E648	Pass, $> 0.45$ watts/cm <sup>2</sup>
Smoke Density	ASTM E662	Pass
Static Coefficient of Friction	ASTM D2047	Pass
Flexibility	EN435	No Damage

## Packaging Information

	Length (mm)	Width (mm)	Thickness (mm)	Sq. ft.	Height (mm)	Volume (m <sup>3</sup> )	# of carton per Pallet	Weight (lb.)
Plank	1219	184	3					
Plank Carton	1227	199	50	39.52 per carton				
Plank Pallet	1240	990	-	1976 per pallet	830	1.061	50	1380