

Metropolitan



Colours



REN2610-8
Astoria



REN2147-8
Soho



REN9653-1
Williamsburg



REN2112-8
Greenwich



REN2147-12
Brooklyn



REN1036-2
Bowery



REN9309
Woodland



REN2147-3
Chelsea



REN9308
Henley



REN1031-76
Lincoln




REN9304
Barrington




Scan to visit product page


Coordinating Moldings | 94" Length



T-Mold



Reducer




Overlap Stair Nose



Metropolitan

Martin & Co.
Floors For Life

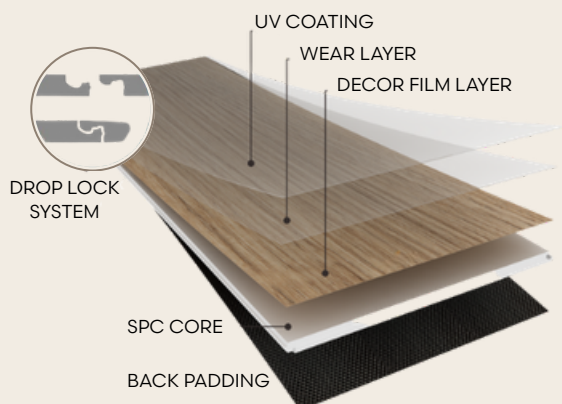

Features

- Valinge Drop Lock Locking System
- Kid & Pet Friendly
- Painted Bevel
- Wood Grain Embossing
- Radiant Heat Approved
- Anti-Microbial Cork Pad
- 20 mil Wear Layer



Product Information

Product	Metropolitan Luxury Vinyl Flooring
Construction	WPC (Wood Plastic Composite) vinyl
Dimensions	7mm x 9" x 60"
Product Thickness	7mm (5.5mm core + 1.5mm pad)
Wear Layer Thickness	20 mil (0.5mm)
Finish	Aluminum Oxide Finish
Warranty	Lifetime Residential / 10 Year Commercial

Testing

Classification	Method	Result
Class	ASTM F1700	Class III, Type B - Embossed
Slip Resistance	ASTM C1028-07	Dry: 0.80; Wet: 0.71
Static Load	ASTM F970	Applied Load: 1000 psi, Residual Indentation: 0.04mm
STC	ASTM E90-09	70
IIC	ASTM E492-09	70
Dimensional Stability	ASTM F2199	Pass: ≤ 0.02 " per linear foot
Resistant to Chemicals	ASTM F925	Pass: Not affected
Abrasion	ASTM D4060	Test Revolutions: 1000, 0.004% mass loss
Antibacterial Activity	ASTM G21-15	Pass: No growth observed on specimens
Reaction to Fire	EN13501-1	Class B fl-s1
Critical Radiant Flux	ASTM E648	Pass, > 0.45 watts/cm ²
Concentration of Dibutyl Phthalate	ISO 16000	$< 1 \mu\text{g}/\text{m}^3$ after 28 days
Concentration of Diethylhexyl Phthalate	ISO 16000	$< 1 \mu\text{g}/\text{m}^3$ after 28 days
Flexibility	EN435	No Damage

Packaging Information

	Length (mm)	Width (mm)	Thickness (mm)	Sq. ft.	Height (mm)	Volume (m ³)	# of carton per Pallet	Weight (lb.)
Plank	1524	229	7					
Plank Carton	1550	235	60	29.06 per carton				
Plank Pallet	1660	1080	-	1200 per pallet	830	1.07	42	1765