

Capstone Click


Martin & Co.
Floors For Life



Capstone Click

Martin & Co.
Floors For Life


Colours

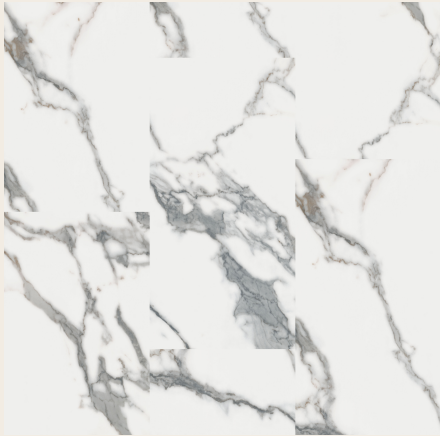

CCL400045-2
Carrara Cloud



CCL89734-1
Champagne Marble

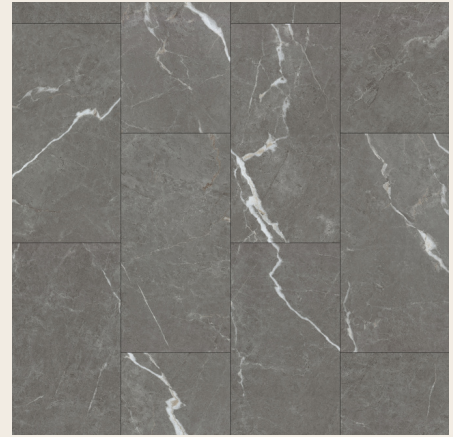

CCL89734-3
Midnight Marble



CCL7221-7
Iron Concrete




CCL437257-1
Desert Limestone




CCL437257-3
Mocha Limestone

Coordinating Moldings | 94" Length



2-in-1 T-Mold / Reducer




Overlap Nosing



Capstone Click

Martin & Co.
Floors For Life

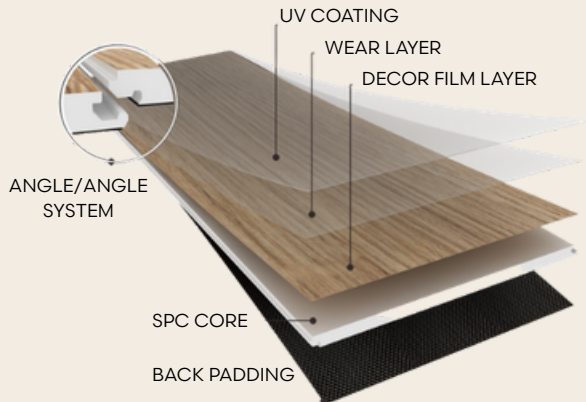

Features

- 2G Angle/Angle Locking System
- Kid & Pet Friendly
- TruEdge Rounded Bevel
- Light Stone Embossing
- Radiant Heat Approved
- IXPE Foam Pad
- 20 mil Wear Layer



Product Information

Product	Capstone Click Luxury Vinyl Flooring
Construction	EVP (Engineered Vinyl Plank) Vinyl
Dimensions	7mm x 12" x 24"
Product Thickness	7mm (5.5mm core + 1.5mm pad)
Wear Layer Thickness	20 mil (0.5mm)
Finish	Aluminum Oxide Finish
Warranty	Lifetime Residential / 10 Year Commercial

Testing

Classification	Method	Result
Class	ASTM F1700	Class III, Type B - Embossed
Slip Resistance	ASTM C1028-07	Dry: 0.80; Wet: 0.71
Static Load	ASTM F970	Applied Load: 1000 psi, Residual Indentation: 0.04mm
STC	ASTM E90-09	71
IIC	ASTM E492-09	71
Dimensional Stability	ASTM F2199	Pass: ≤ 0.02 " per linear foot
Resistant to Chemicals	ASTM F925	Pass: Not affected
Abrasion	ASTM D4060	Test Revolutions: 1000, 0.004% mass loss
Antibacterial Activity	ASTM G21-15	Pass: No growth observed on specimens
Reaction to Fire	EN13501-1	Class B fl-s1
Critical Radiant Flux	ASTM E648	Pass, > 0.45 watts/cm ²
Concentration of Dibutyl Phthalate	ISO 16000	$< 1 \mu\text{g}/\text{m}^3$ after 28 days
Concentration of Diethylhexyl Phthalate	ISO 16000	$< 1 \mu\text{g}/\text{m}^3$ after 28 days
Flexibility	EN435	No Damage

Packaging Information

	Length (mm)	Width (mm)	Thickness (mm)	Sq. ft.	Height (mm)	Volume (m ³)	# of carton per Pallet	Weight (lb.)
Plank	610	305	7					
Plank Carton	620	315	44	16.02 per carton				
Plank Pallet	1240	990	-	961.2 per pallet	830	1.02	60	2560

MELMART.COM